NOTE:

BUILDER AND OWNER TO VERIFY DIMENSIONS, NOTES AND ALL CONDITIONS OF PLANS PRIOR TO CONSTRUCTION. PLAN SERVICE IS NOT RESPONSIBLE FOR ERRORS OR OMISSIONS.

NOTE:

1. 9'-0" CEILING HEIGHT UNLESS OTHERWISE NOTED

DOOR SCHEDULE

MARK	SIZE	TYPE	REMARKS
1	3'-0" x 6'-8" x 1 3/4	FULL LITE, SIDELITES & TRANSOM	EXTERIOR METAL INSUL.
2	3'-0" x 6'-8" x 1 3/4	FULL LITE	" " "
3	(2) 2'-6" x 6'-8" x 1 3/4	" "	" " "
4	3'-0" x 6'-8" x 1 3/4	SIX PANEL	" " "
5	3'-0" x 6'-8" x 1 3/8	" "	INTERIOR MASONITE
6	2'-6" x 6'-8" x 1 3/8	" "	" "
7	2'-0" x 6'-8" x 1 3/8	" "	" "
8	3'-0" x 6'-8" x 1 3/8	SIX PANEL/ POCKET	" "
9	18'-0" x 7'-0"	OVERHEAD GARAGE	STEEL
10	9'-0" x 7'-0"	" "	"

WINDOW SCHEDULE

MARK	SIZE	TYPE	REMARKS
A	(2) 3'-0" x 6'-0"	SINGLE HUNG	VINYL INSUL
B	3'-0" x 6'-0"	" "	" "
C	(2) 2'-6" x 6'-0"	" "	" "
D	(2) 3'-0" x 5'-0"	" "	" "
E	3'-0" x 5'-0"	" "	" "
F	2'-0" x 3'-0"	" "	" "
G	4'-0" x 4'-0"	OBSCURE GLASS	" "

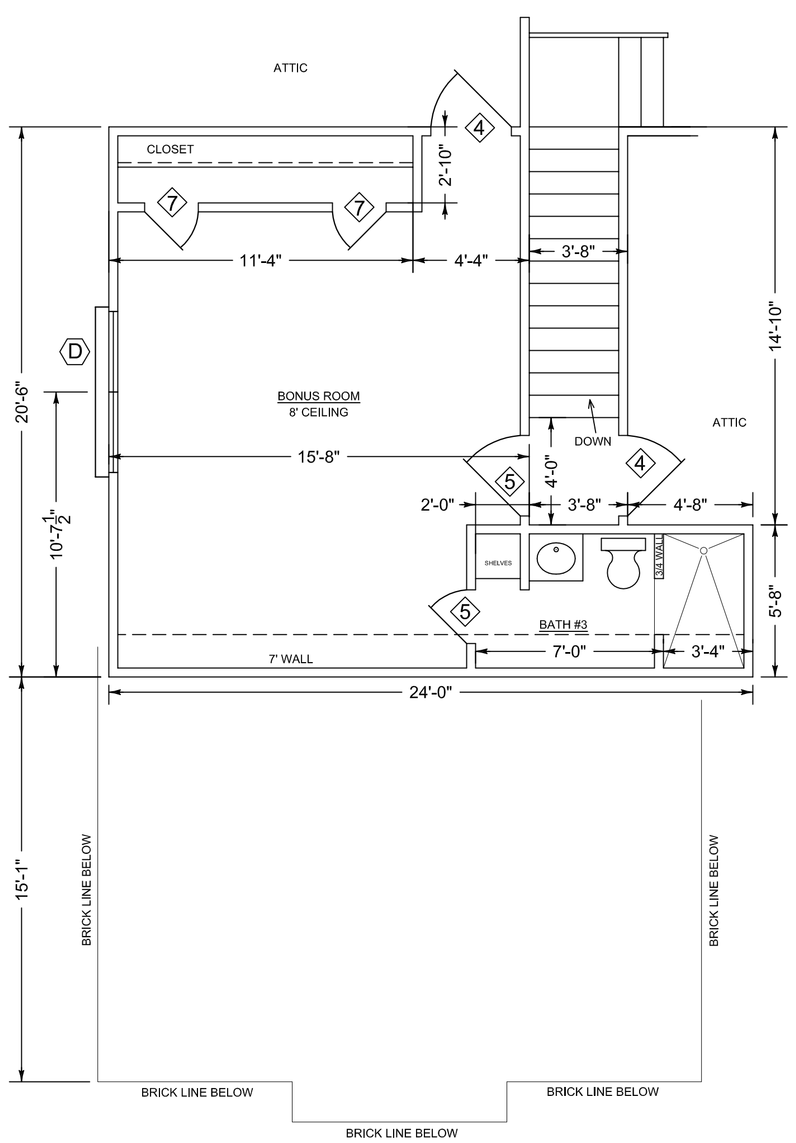

SQUARE FOOTAGE

MAIN FLOOR HEATED:	2533 W/OUT BRICK
BONUS ROOM:	368
TOTAL HEATED:	2901
GARAGE:	680
PORCHES:	585
TOTAL:	4166

FLOOR PLAN

SCALE 1/4" = 1'-0"

406 Oakwood Dr.

Heated sq. ft: 2901

Unheated sq. ft: 1265

October 2018

Plan no. 1826-JL

Claire's Home Designs
5775 Montgomery Hwy. Ste. 2 791-1327

A new home for: The Lee Family