NOTE:

1. 9'-0" CEILING HEIGHT UNLESS OTHERWISE NOTED

NOTE:

BUILDER AND OWNER TO VERIFY DIMENSIONS, NOTES AND ALL CONDITIONS OF PLANS PRIOR TO CONSTRUCTION. PLAN SERVICE IS NOT RESPONSIBLE FOR ERRORS OR OMISSIONS.

WINDOW SCHEDULE

MARK	SIZE	TYPE	REMARKS
A	(3) 3'-0" x 5'-0"	SINGLE HUNG	VINYL INSUL
B	(2) 3'-0" x 5'-0"	" "	" "
C	3'-0" x 5'-0"	SINGLE HUNG FRONT GABLE	" "
D	3'-0" x 3'-0"	" "	" "
E	2'-0" x 3'-0"	SINGLE HUNG FRONT GABLE	" "

DOOR SCHEDULE

MARK	SIZE	TYPE	REMARKS
1	(2) 3'-0" x 6'-8" x 1 3/4	3/4 LITE	EXTERIOR METAL INSUL.
2	3'-0" x 6'-8" x 1 3/4	3/4 LITE	" " "
3	3'-0" x 6'-8" x 1 3/4	SIX PANEL	" " "
4	2'-8" x 6'-8" x 1 3/4	" "	" " "
5	2'-6" x 6'-8" x 1 3/4	" "	" " "
6	3'-0" x 6'-8" x 1 3/8	SIX PANEL	INTERIOR MASONITE
7	2'-6" x 6'-8" x 1 3/8	" "	" "
8	2'-4" x 6'-8" x 1 3/8	" "	" "
9	2'-0" x 6'-8" x 1 3/8	" "	" "
10	1'-6" x 6'-8" x 1 3/8	THREE PANEL	" "
11	2'-4" x 6'-8" x 1 3/8	SIX PANEL/ POCKET	" "
12	(2) 2'-0" x 6'-8" x 1 3/8	15-LITE	" "
13	18'-0" x 7'-0"	OVERHEAD GARAGE	STEEL

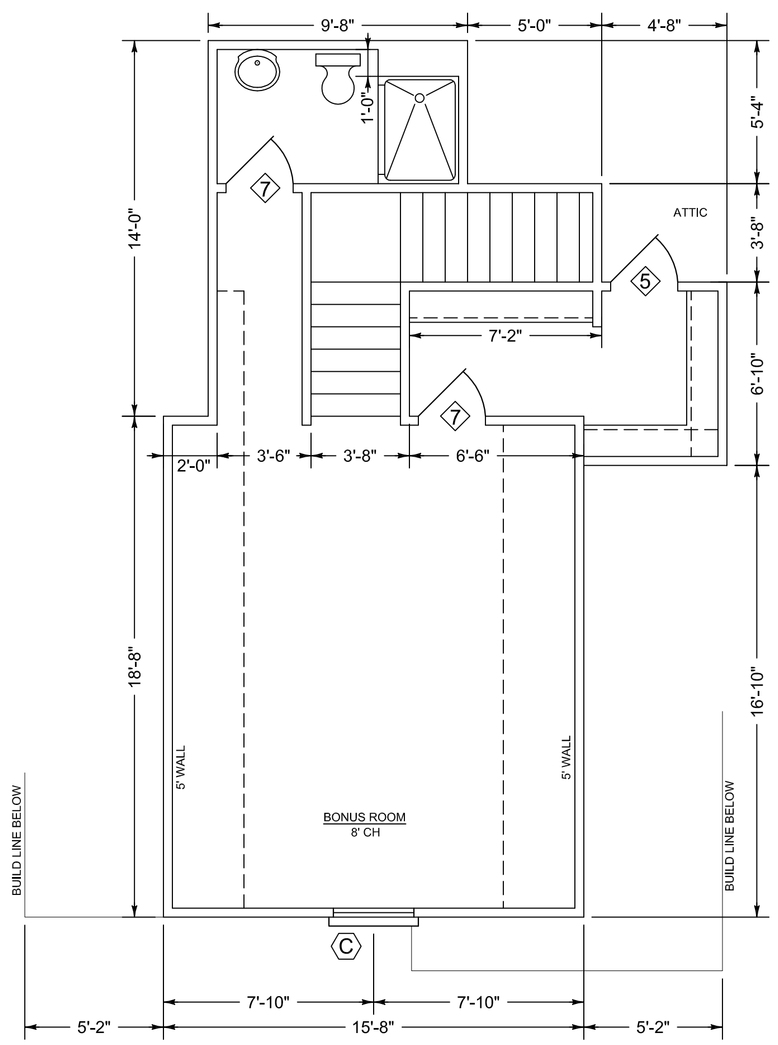

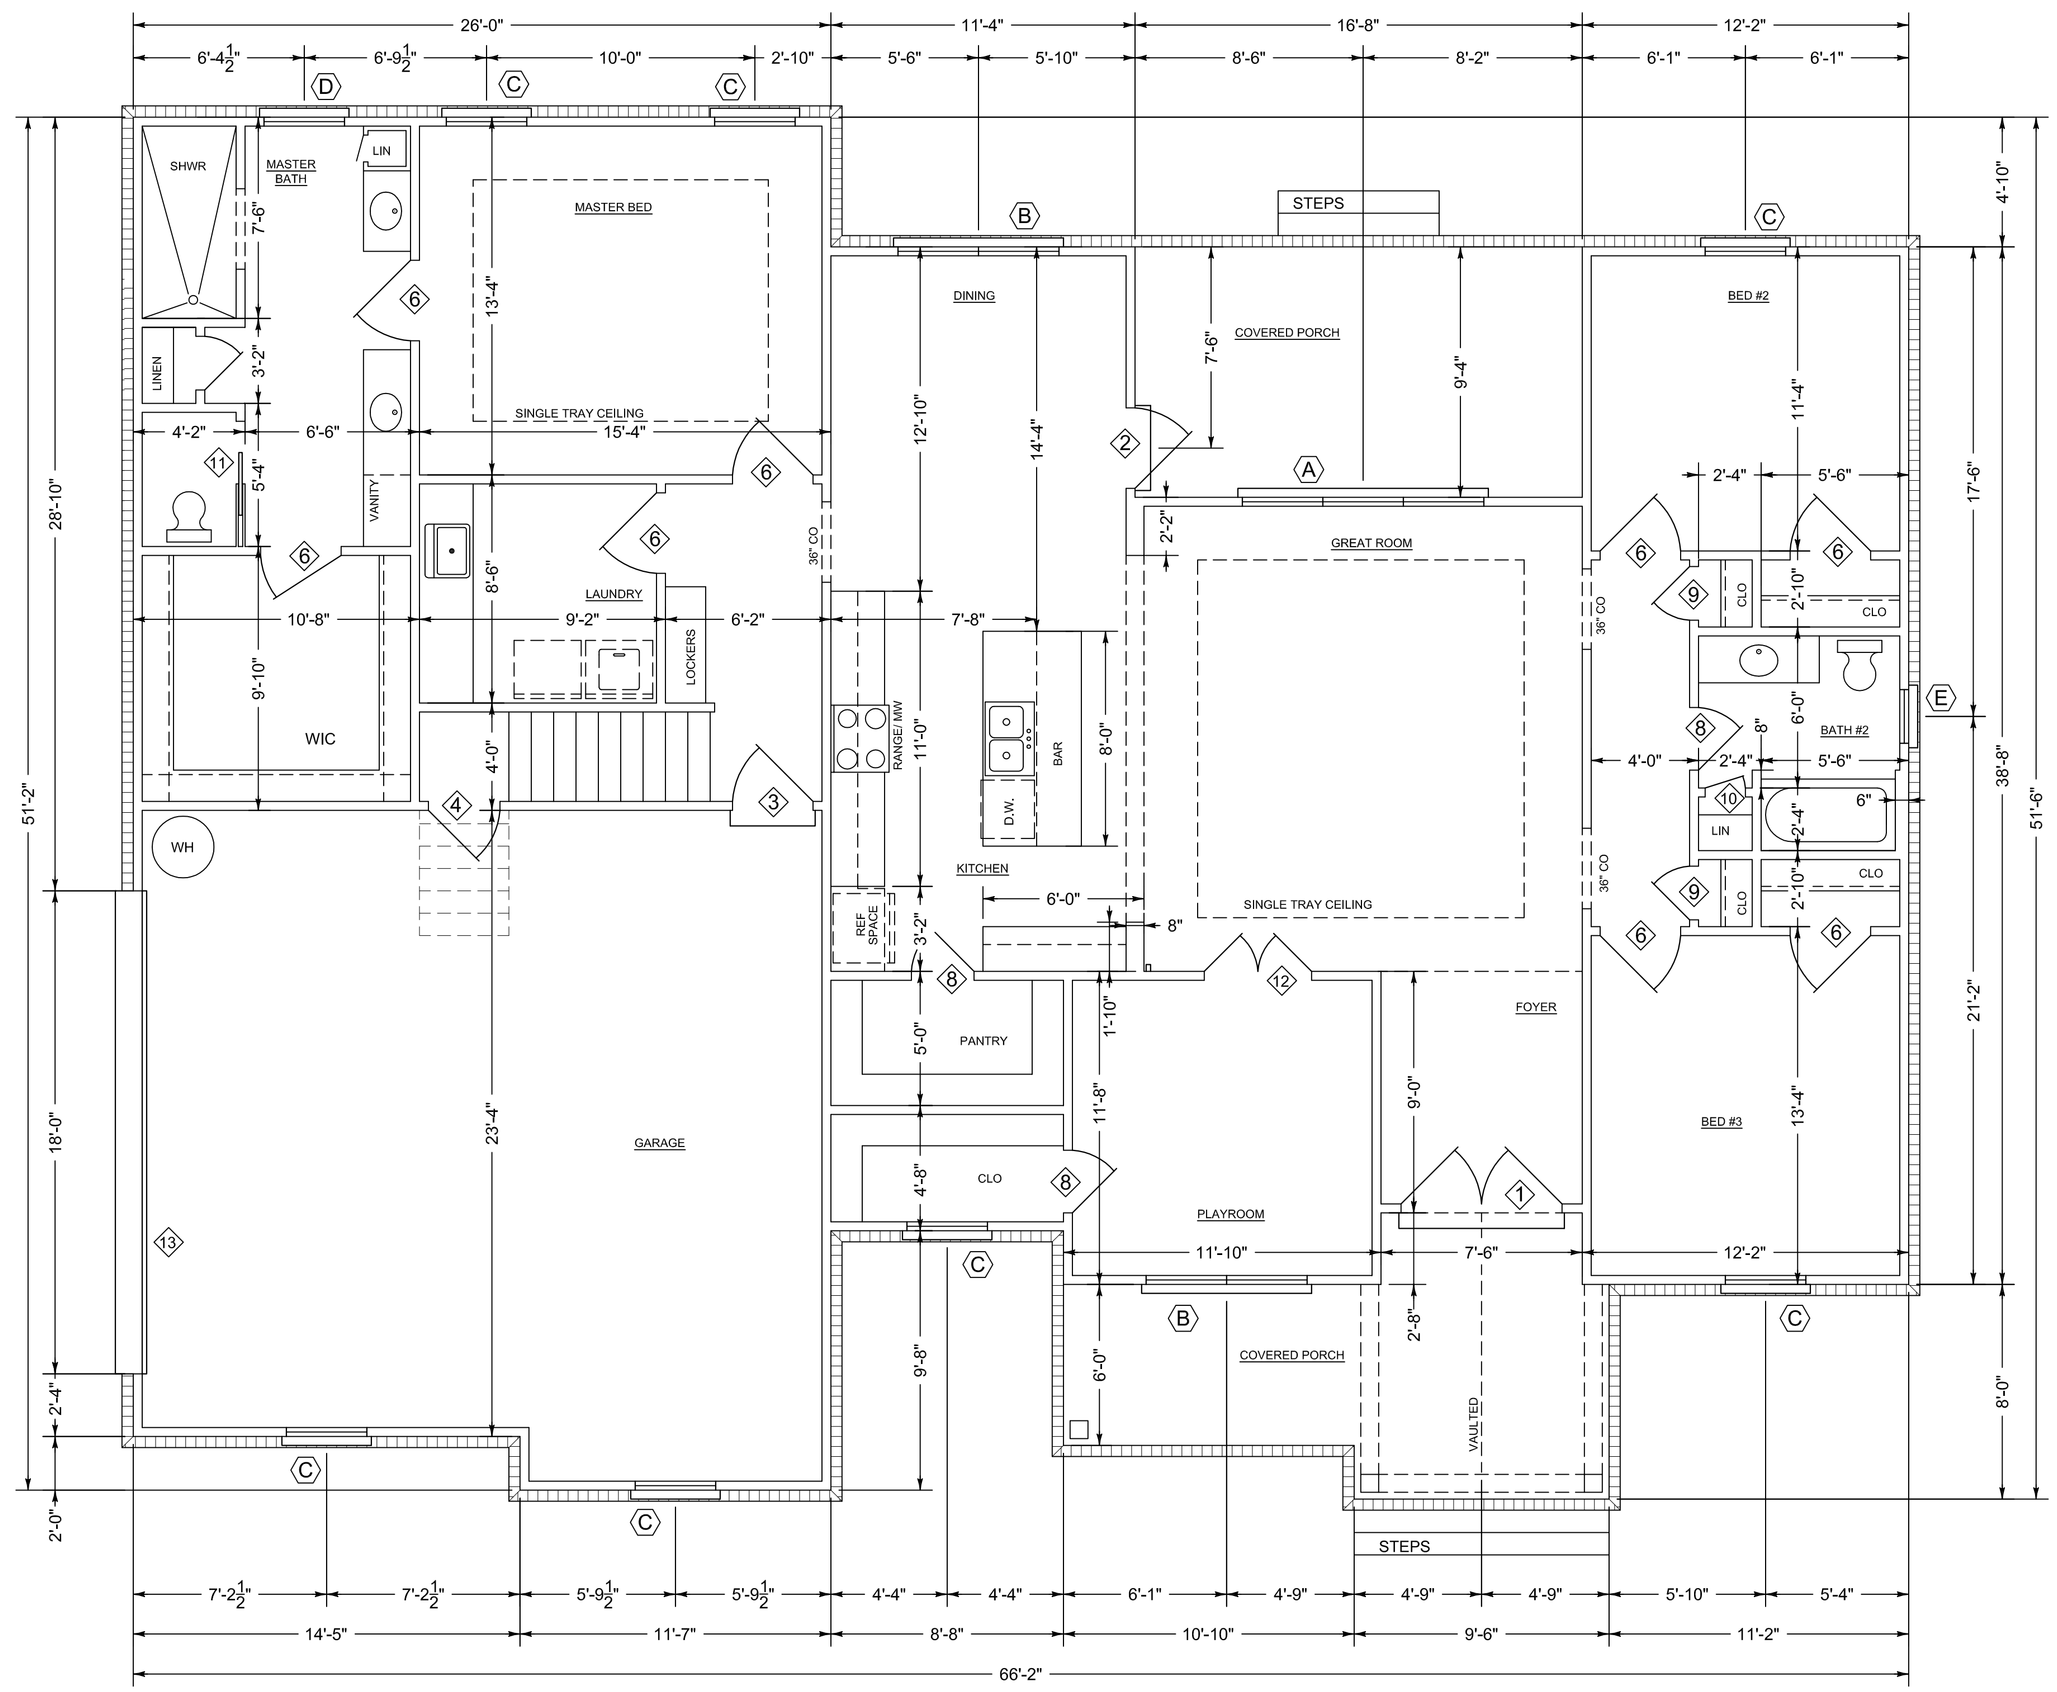

FLOOR PLAN

SCALE 1/4" = 1'-0"

SQUARE FOOTAGE

MAIN FLOOR:	2037
BONUS ROOM:	486
TOTAL HEATED:	2523
GARAGE:	625
PORCHES:	317
GRAND TOTAL:	3465

Claire's Home Designs
5775 Montgomery Hwy. Ste. 2
A new home for: The Perry Family
by: Southern Homebuilders

October 2021

Plan no. 2132-AP

Heated sq. ft: 2523

Unheated sq. ft: 942